# TEST REPORT

*No. QA00003*

**Determine the Pb, Cd, Hg, Cr(VI), PBBs , PBDEs, DEHP, BBP, DBP&DIBP content of the sample,performed in accordance with RoHS Directive 2011/65/EU(RoHS 2.0) and its subsequent amendments Directive (EU) 2015/863**

| | |
|---|---|
| **PRODUCT** | Electricity meter |
| **MODEL(s) TESTED** | JXR2, JXVA |
| **TRADE MARK** | ETTROIT |
| **APPLICANT** | Wenzhou Yijie Electric Co., Ltd.<br>No. 83, Fengquan Road, Tianhe street, Wenzhou Economic and Technological Development Zone, WeZhou City, Zhejiang Province |

| | | |
|---|---|---|
| Tested by | Engineer | Kevin Chen |
| Reviewed by | Laboratory Manager | Leo Qin |
| Approved by | Technical Manager | Alger Shi |

**Revision Sheet**

| Release No. | Date | Revision Description |
|---|---|---|
| Rev. 01 | 2024-01-31 | First edition: test report nr. QA00003 |

The results of tests and checks reported in this Test Report refer exclusively to the samples tested and described in the Report itself.
This Report shall not be reproduced partially without the written approval of IMQ Certification (Shanghai) Co., Ltd.
The authenticity of this Test Report and its contents can be verified by contacting IMQ Certification (Shanghai) Co., Ltd. responsible for this Test Report.

**IMQ Certification (Shanghai) Co., Ltd.**
Unit A401, No.258 Yangzhai Road
Changning District, Shanghai, 200051 P.R. China
Tel: +86 (0)21 52380507 - Fax: +86 (0)21 52400832
info@imq-china.com www.imq-china.com

# GENERAL DATA

| **SAMPLE** | | |
|---|---|---|
| Samples received on | 2024-01-16 | **Item(s) sampled and sent by applicant** |
| Reference samples | See model list in ANNEX 1 | |
| Samples tested No. | 001 & 002 | |

| **TESTING LOCATION** | |
|---|---|
| Testing dates | 2024-01-16~2024-01-31 |
| Testing laboratory | IMQ Certification (Shanghai) Co., Ltd.<br>Unit A401, No.258 Yangzhai Road<br>Changning District, Shangha, 200050, P.R.China |
| Testing site | STQ Testing Services Co., Ltd.<br>Building 1, 15 Yinzhu Road, High-new district, Suzhou, China 215129 |

| **TESTING INFORMATION** | |
|---|---|
| Test Request | According to customer's requirements, Split the sample and determine the Pb, Cd, Hg, Cr(VI), PBBs, PBDEs, DEHP, BBP, DBP&DIBP content of the parts. |
| Test method | 1. EN 62321-1:2013 Determination of certain substances in electrotechnical products - Part 1: Introduction and overview<br>2. EN 62321-2:2014 Determination of certain substances in electrotechnical products - Part 2: Disassembly, disjunction and mechanical sample preparation<br>3. EN 62321-3-1:2014 Determination of certain substances in electrotechnical products - Part 3-1: Screening - Lead, mercury, cadmium, total chromium and total bromine using X-ray fluorescence spectrometry.<br>4. Wet Chemical Test Method<br>a. Determination of Lead ,Cadmium by ICP-OES with reference to EN 62321-5:2014<br>b. Determination of Mercury by ICP-OES with reference to EN 62321-4:2014+A1:2017<br>c. Determination of Hexavalent Chromium by Spot test or UV-Vis Method with reference to EN 62321-7-2: 2017<br>d. Determination of PBBs and PBDEs by GC-MS with reference to EN 62321-6: 2015<br>e. Determination of Phthalates by GC-MS with reference to EN 62321-8:2017 |
| Test Conclusion | Based on the analysis on the submitted samples, the test results **do comply with** the RoHS Directive 2011/65/EU(RoHS 2.0) and its subsequent amendments Directive (EU) 2015/863 |

| **ENVIRONMENTAL CONDITION** | |
|---|---|
| ***Parameter*** | ***Measured*** |
| Ambient Temperature | 20 ~ 25 °C |
| Relative Humidity | 50 ~ 60 % |
| Atmospheric Pressure | 900 ~1000 mbar |

# REFERENCE DOCUMENT

| DOCUMENT | | DATE | TITLE |
|---|---|---|---|
| ☒ | EN 62321 | 2009 | Electrotechnical products - Determination of levels of six regulated substances |
| ☒ | EN 62321-1 | 2013 | Determination of certain substances in electrotechnical products - Part 1: Introduction and overview |
| ☒ | EN 62321-2 | 2014 | Determination of certain substances in electrotechnical products - Part 2: Disassembly, disjointment and mechanical sample preparation |
| ☒ | EN 62321-3-1 | 2014 | Determination of certain substances in electrotechnical products - Part 3-1: Screening - Lead, mercury, cadmium, total chromium and total bromine by X-ray fluorescence spectrometry |
| ☒ | EN 62321-4 | 2014 | Determination of certain substances in electrotechnical products - Part 4: Mercury in polymers, metals and electronics by CV-AAS, CV-AFS, ICP-OES and ICP-MS |
| ☒ | EN 62321-5 | 2014 | Determination of certain substances in electrotechnical products - Part 5: Cadmium, lead and chromium in polymers and electronics and cadmium and lead in metals by AAS, AFS, ICP-OES and ICP-MS |
| ☒ | EN 62321-8 | 2017 | Determination of certain substances in electrotechnical products - Part 8: Phthalates in polymers by gas chromatography-mass spectrometry (GC-MS), gas chromatography-mass spectrometry using a pyrolyzer/thermal desorption accessory (Py/TD-GC-MS) |

# EQUIPMENT UNDER TEST (EUT) DETAILS

| **MODEL (basic)** | **Description** |
|---|---|
| JXR2, JXVA | Electricity meter |
| **VARIANTS (derived)** | **Description** |
| See model list in ANNEX 1 | Electricity meter |

| | |
|---|---|
| **MANUFACTURER** | Wenzhou Yijie Electric Co., Ltd.<br>No. 83, Fengquan Road, Tianhe street, Wenzhou Economic and Technological Development Zone, WeZhou City, Zhejiang Province |
| **ASSEMBLY PLANT(s)** | Wenzhou Yijie Electric Co., Ltd.<br>No. 83, Fengquan Road, Tianhe street, Wenzhou Economic and Technological Development Zone, WeZhou City, Zhejiang Province |

| **GENERAL PRODUCT INFORMATION:** |
|---|
| THE PRODUCTS TESTED IN THIS REPORT ARE ELECTRICITY METER |

| **COPY OF MARKING PLATE:** |
|---|
| The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.<br>N.A. |

# SUMMARY OF TEST

| POSSIBLE TEST CASE VERDICTS: | |
|---|---|
| Test object does meet the requirement | P(ass)/Comply |
| Test object does not meet the requirement | F(ail)/ /Not Comply |
| Test case does not apply to the test object | N.A. |
| Test object has not been checked | N.C. |

**GENERAL REMARKS:**

Tests and check results, written here, refers only to tested object that are described in this report.
Only full reproductions of this Test Report are allowed without written authorization of IMQ Certification (Shanghai) Co., Ltd.

Throughout this report a point (coma) is used as the decimal separator.

Unless otherwise stated the uncertainties for the tests and measurements are evaluated in according to STQ Operational Instruction STQ-QP-5.4-01
The uncertainties evaluation has been carried out in accordance with IEC Guide 115 “Application of Uncertainty of measurement’s to Conformity Assessment Activity in the Electrotechnical Sector” and IECEE CTL decision sheet DSH 251x.

Internal Procedure STQ-QP-5.6-01 ensure that the requirements for traceability of calibrations, of all test equipment requiring calibration and calibration intervals are met.

The ability or reliability of this product to perform its intended function in a particular application has not been investigated.
Unless otherwise specified, warnings, installation instruction and/or user manual provided with the sample have been checked in English version only.
IMQ Certification (Shanghai) Co., Ltd. declines any responsibility derived from missing or wrong information provided aside by the applicant.

Manufacturer Wenzhou Yijie Electric Co., Ltd. declared that:
For all models of electricity meter listed in this report: all models are made by same materials only different in colors, sizes and appearances.
Since manufacturer is not able to provide samples of all models listed in this report, only selected model has been tested, but based on the guarantee letter provided by the manufacturer. IMQ Certification (Shanghai) Co., Ltd. takes no responsibility for any mistakes and the problems of products consistency caused by inaccurate and/or invalid information submitted by the applicant. The manufacturer will take the responsibility of all discrepancy and risk.

# REQUIREMENTS AND TESTS

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 1# | White plastic shell (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 2# | Transparent plastic lampshade (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 3# | Black plastic button (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 4# | White plastic shell with color printing (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 5# | Black plastic switch (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 6# | Black plastic switch (JXR2) | XRF | BL | BL | BL | BL | IN | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 7# | Silvery metal rivet (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 8# | Black plastic part (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 9# | White plastic part (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 10# | Silvery metal screw (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 11# | Yellow plastic part (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 12# | Green plastic slot (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 13# | Silvery metal pin (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 14# | Silvery metal nut (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 15# | Color plastic label (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 16# | Beige plastic gear (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 17# | Silvery metal shaft (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 18# | Black plastic gear (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 19# | Silvery metal shell (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 20# | Black heat shrink tubing (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 21# | Silvery metal wire (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 22# | Silvery metal connector (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 23# | Black wire jacket (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 24# | Red wire jacket (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 25# | White plastic connector (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 26# | Silvery metal solder tin (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 27# | Golden metal pin (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 28# | Coppery metal contact sheet (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 29# | Black carbon brush (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 30# | White plastic frame (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 31# | Silvery metal cover (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 32# | Black plastic sheet (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 33# | Golden metal bearing (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 34# | Silvery metal clip (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 35# | Black magnet frame (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 36# | Coppery metal coil (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 37# | Silvery metal silicon steel sheet (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 38# | Silvery metal shaft (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 39# | Black plastic ring (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 40# | Silvery metal solder tin (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 41# | Red plastic ring (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 42# | White plastic frame (JXR2) | XRF | BL | BL | BL | BL | IN | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. | N.D. | N.D. |
| 43# | Coppery metal contact sheet (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 44# | Green coating (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 45# | White plastic tube (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 46# | White plastic tube (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 47# | Silvery metal spring (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 48# | Silvery magnet part (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 49# | Black plastic gear(JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 50# | Black plastic frame (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 51# | Black plastic skin (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 52# | Silvery metal shell (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 53# | Black rubber stopper (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 54# | Silvery metal electrode (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 55# | Brown electrolytic paper(JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 56# | Grey metal foil(JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 57# | Silvery metal foil (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 58# | Black magnet core (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 59# | Coppery metal coil (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 60# | Black heat shrink tubing (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 61# | Black thermistor(JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 62# | Blue varistor(JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 63# | Silvery metal solder tin (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 64# | Black diode (JXR2) ① | XRF | IN | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | 20648 | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 65# | Black chip resistor (JXR2) | XRF | IN | BL | BL | IN | BL | | --- | --- | --- | --- |
| | | CHEM | 359 | --- | --- | N.D. | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 66# | Brown chip capacitor (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 67# | Black plastic tape (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 68# | White plastic slot (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 69# | Silvery metal pin (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 70# | White chip LED (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 71# | Green PCB (JXR2) | XRF | BL | BL | BL | BL | IN | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. | N.D. | N.D. |
| 72# | Black triode (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 73# | Black plastic frame (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 74# | Black plastic part (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 75# | Silvery metal sheet (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 76# | Silvery metal spring (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 77# | Yellow plastic tape (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 78# | Black magnet frame (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 79# | Black plastic frame (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 80# | Coppery metal cover (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 81# | Black IC (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 82# | Black rectifier bridge(JXR2) ① | XRF | IN | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | 22352 | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 83# | Silvery metal solder tin (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 84# | Black IC (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 85# | Black IC (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 86# | Black operational amplifier(JXR 2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 87# | Silvery metal contact point(JXR2) ② | XRF | BL | IN | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | 6878 | --- | --- | --- | --- | --- | --- | --- | --- |
| 88# | Silvery metal contact sheet(JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 89# | Silvery metal frame (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 90# | Silvery metal screw (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 91# | Beige plastic frame(JXR2) | XRF | BL | BL | BL | BL | IN | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. | N.D. | N.D. |
| 92# | Silvery metal screw (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 93# | Black plastic shell (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 94# | Silvery metal spring (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 95# | Pink resistor (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 96# | Silvery metal pin (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 97# | Blue transparent wire jacket (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 98# | Red transparent wire jacket (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 99# | Black heat shrink tubing (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 100# | Silvery metal contact sheet (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 101# | Coppery metal wire (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 102# | Silvery metal spring (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 103# | Silvery metal contact point (JXR2) ② | XRF | BL | IN | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | 4292 | --- | --- | --- | --- | --- | --- | --- | --- |
| 104# | Silvery metal contact sheet (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 105# | Black plastic frame (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 106# | Silvery metal solder tin (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 107# | Black heat shrink tubing (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 108# | Black diode (JXR2) ① | XRF | IN | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | 2312 | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 109# | Blue foam ring(JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 110# | Silvery metal sheet (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 111# | Silvery metal spring (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 112# | Silvery metal spring(JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 113# | White plastic part (JXR2) | XRF | BL | BL | BL | BL | IN | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. | N.D. | N.D. |
| 114# | Silvery metal part (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 115# | Silvery metal plate (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 116# | Silvery metal solder tin(JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 117# | Silvery metal spring (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 118# | Brown transparent plastic frame (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 119# | White plastic part (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 120# | Beige plastic part (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 121# | Yellow plastic part (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 122# | White plastic frame (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 123# | Coppery metal coil (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 124# | White plastic frame (JXR2) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 125# | Silvery metal frame (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 126# | Silvery metal part (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 127# | Golden metal rivet (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 128# | Coppery metal part (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 129# | Silvery metal spring (JXR2) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 130# | Silvery metal contact sheet (JXR2) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 131# | Color plastic sheet (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 132# | White plastic frame (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 133# | White plastic part (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 134# | Silvery metal screw (JXVA) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 135# | Silvery metal screw (JXVA) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 136# | Black IC (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 137# | White plastic connector (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 138# | Red and white wire jacket (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 139# | Silvery metal solder tin (JXVA) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 140# | White chip LED (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 141# | Transparent plastic film (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 142# | Black Nixie tube (JXVA) | XRF | BL | BL | BL | BL | IN | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. | N.D. | N.D. |
| 143# | Black plastic frame (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 144# | Silvery metal pin (JXVA) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 145# | Silvery metal sheet (JXVA) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 146# | Silvery metal sheet (JXVA) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 147# | Black plastic button (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 148# | Brown chip capacitor (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 149# | Black chip resistor (JXVA) | XRF | IN | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | 844 | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 150# | Black IC (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 151# | Silvery metal screw (JXVA) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 152# | Coppery metal frame (JXVA) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 153# | White transparent wire jacket (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 154# | Black plastic shell (JXVA) | XRF | BL | BL | BL | BL | IN | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. | N.D. | N.D. |
| 155# | Green plastic skin (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 156# | White plastic frame (JXVA) | XRF | BL | BL | BL | BL | IN | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. | N.D. | N.D. |
| 157# | White plastic frame (JXVA) | XRF | BL | BL | BL | BL | IN | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. | N.D. | N.D. |
| 158# | Coppery metal sheet (JXVA) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 159# | Silvery metal contact point (JXVA) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 160# | Coppery metal coil (JXVA) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 161# | Silvery metal sheet (JXVA) | XRF | BL | BL | BL | IN | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | Neg. | --- | --- | --- | --- | --- | --- |
| 162# | Black IC (JXVA) | XRF | IN | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | 30 | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 163# | Black diode (JXVA) ① | XRF | IN | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | 9603 | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 164# | Black chip resistor (JXVA) | XRF | IN | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | 696 | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 165# | Red glass diode (JXVA) ① | XRF | IN | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | 138414 | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 166# | White plastic slot (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |
| 167# | Black IC (JXVA) ① | XRF | IN | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | 11227 | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

| Part No. | Test Part Description | Note | Test Results (1)(2) (mg/kg) | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Pb | Cd | Hg | Cr(VI) | PBBs | PBDEs | DEHP | BBP | DBP | DIBP |
| 168# | Coppery metal contact sheet (JXVA) | XRF | BL | BL | BL | BL | --- | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| 169# | Transparent plastic tape (JXVA) | XRF | BL | BL | BL | BL | BL | | --- | --- | --- | --- |
| | | CHEM | --- | --- | --- | --- | --- | --- | N.D. | N.D. | N.D. | N.D. |

******** To be continued ********

## TEST PART PHOTOS

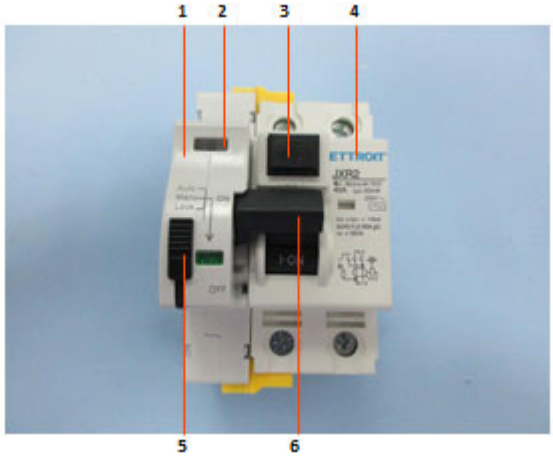


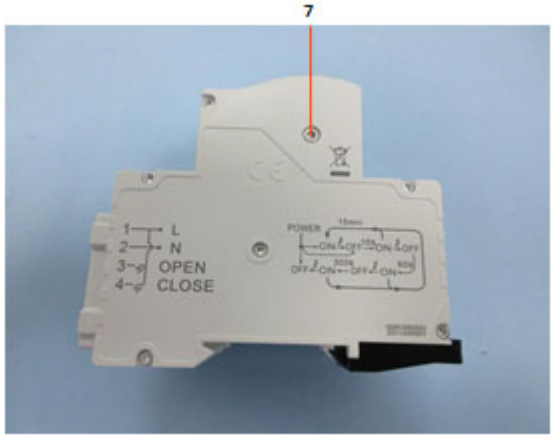


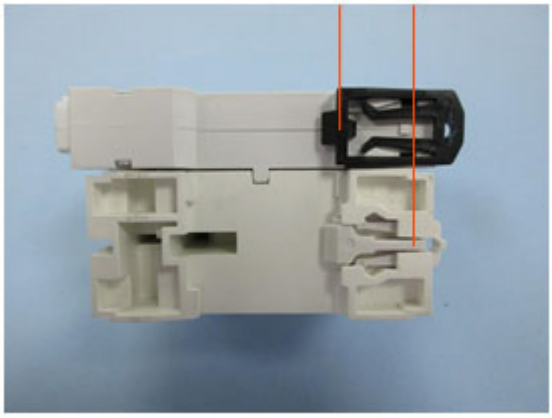


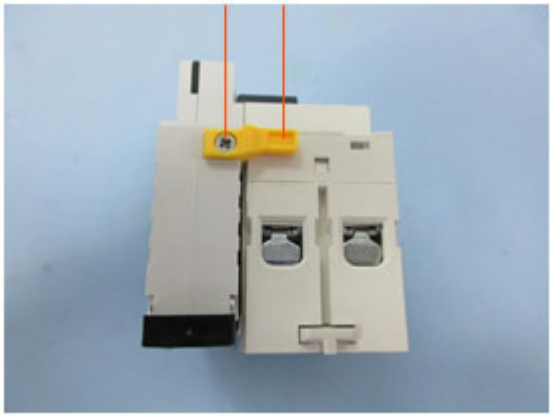


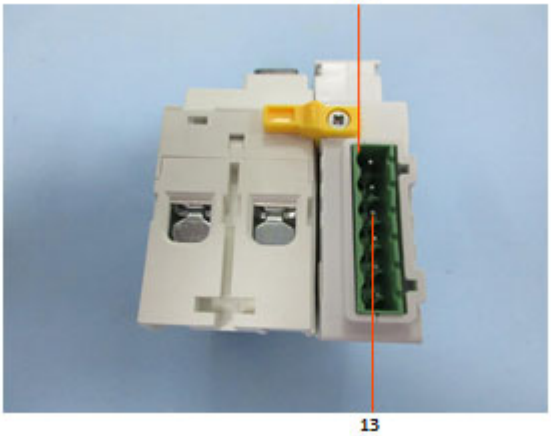

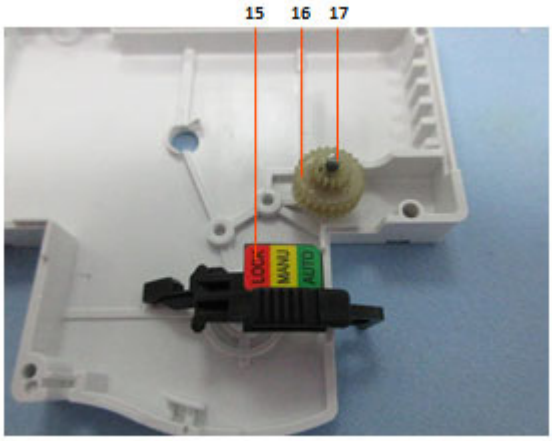
15
16
17
LOCK
MANU
AUTO

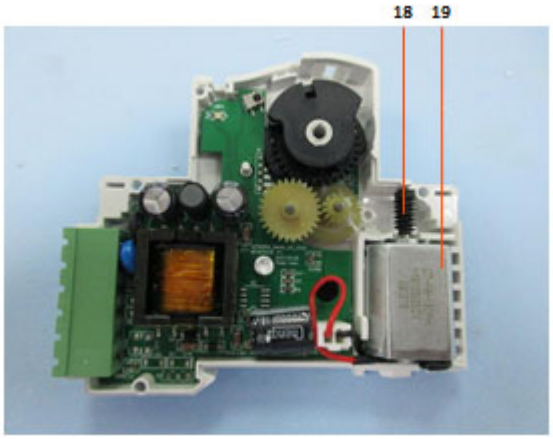
18
19

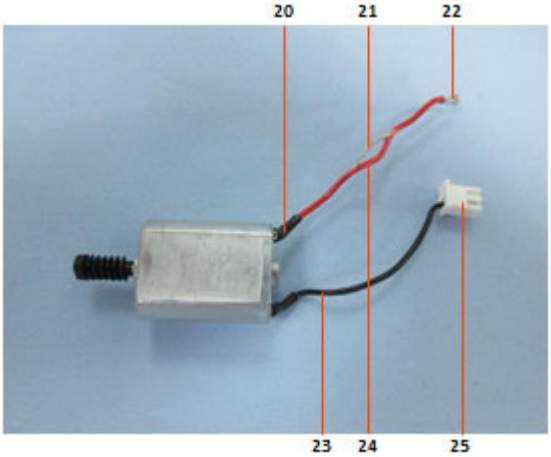
20
21
22
23
24
25

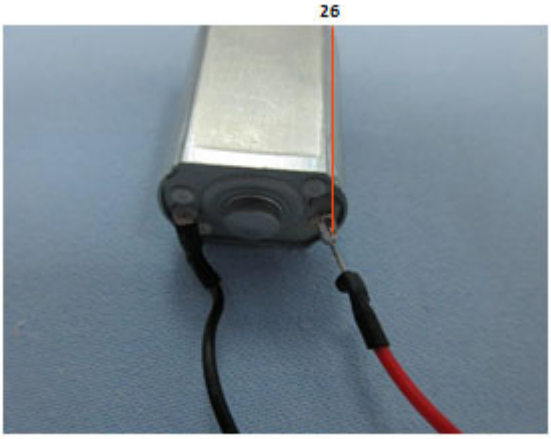
26

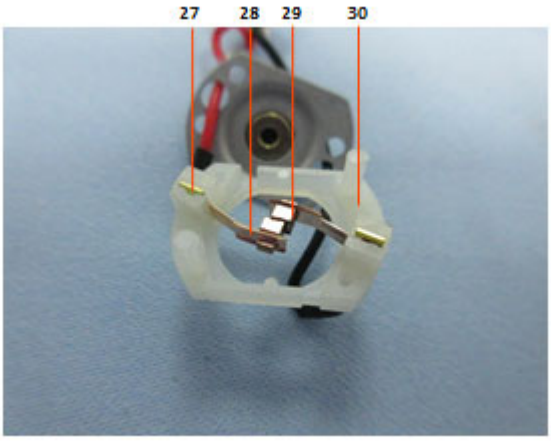
27
28
29
30

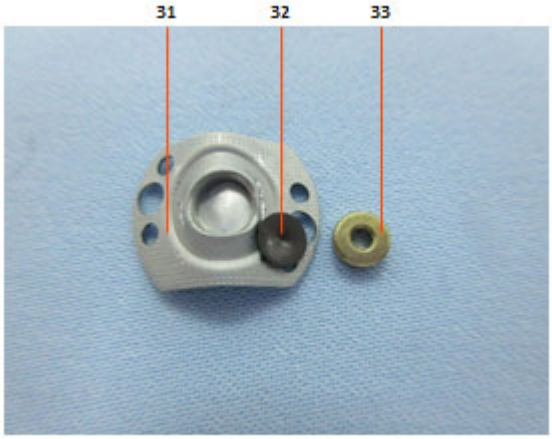
31
32
33

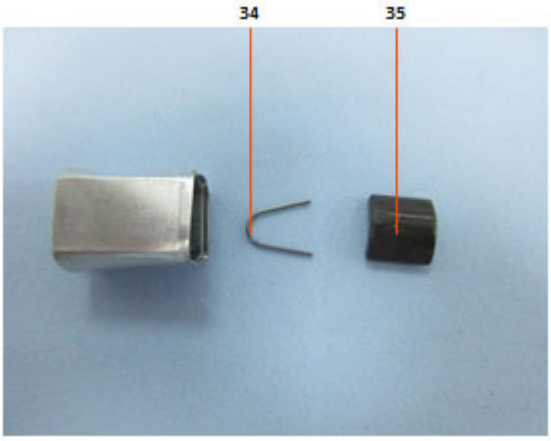
34
35

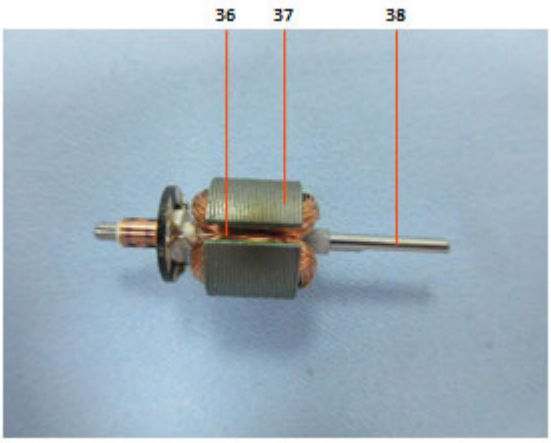
36
37
38

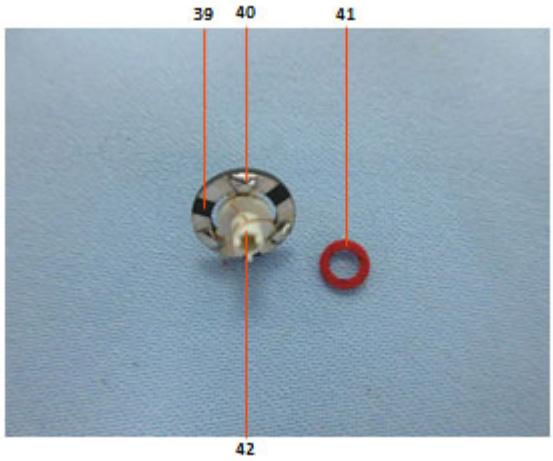
39
40
41
42

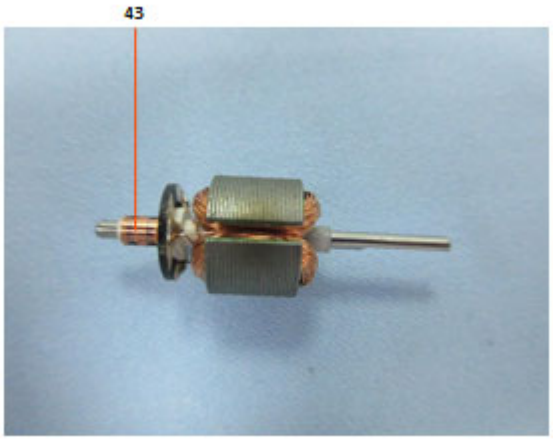
43

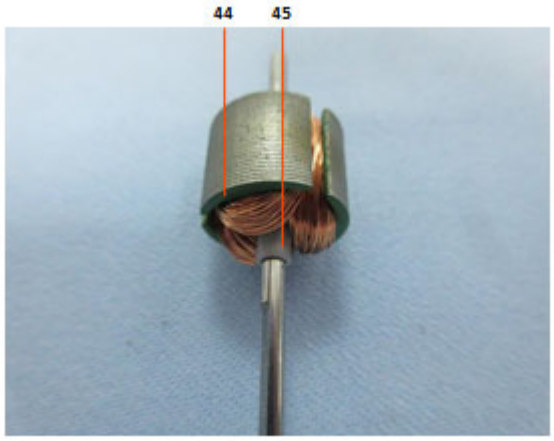
44
45

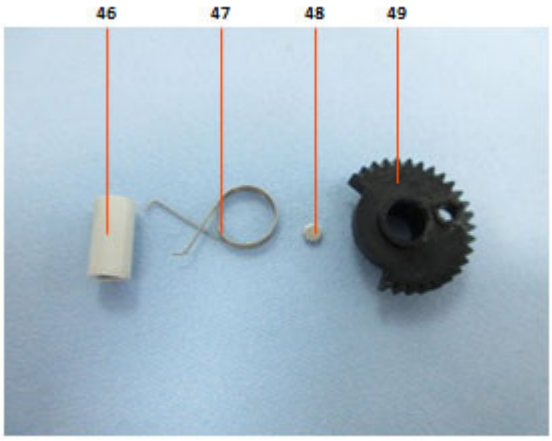
46
47
48
49

50

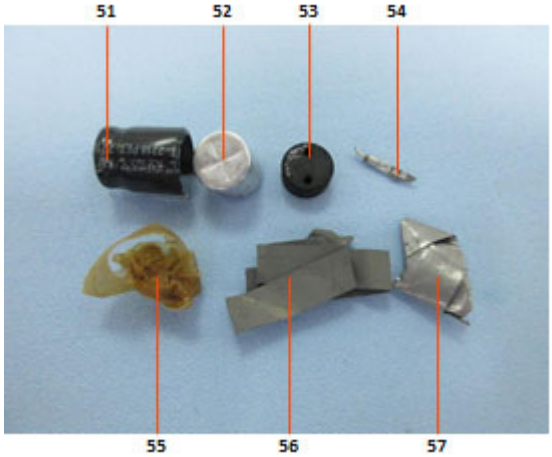
51
52
53
54
55
56
57

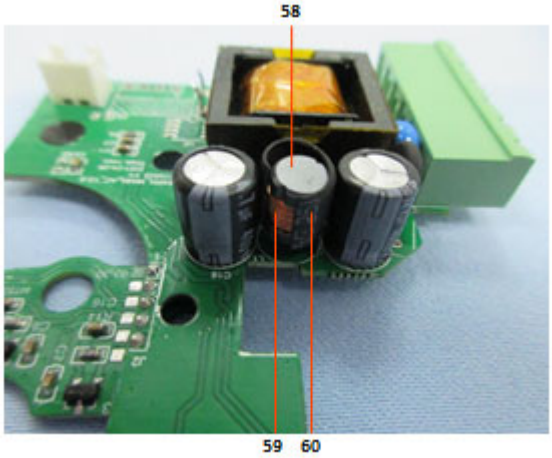
58
59
60

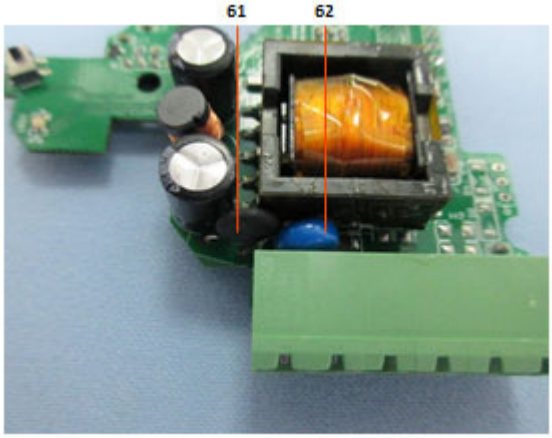
61
62

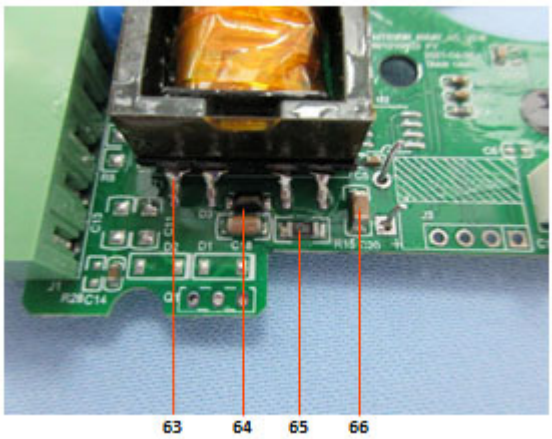
63
64
65
66

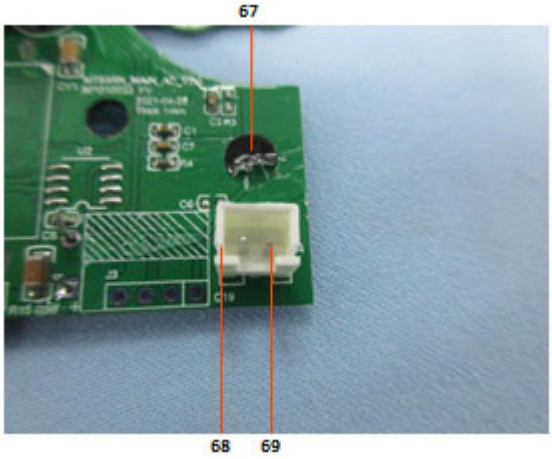
67
68
69

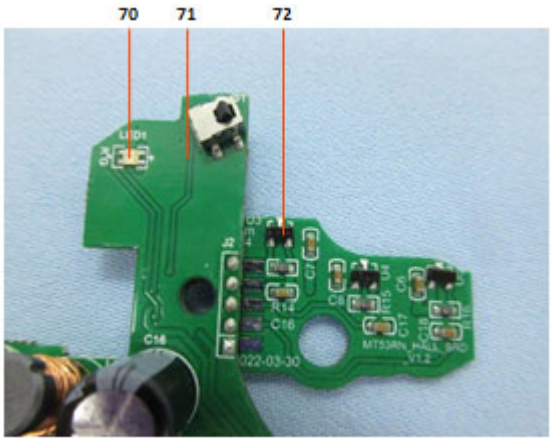
70
71
72

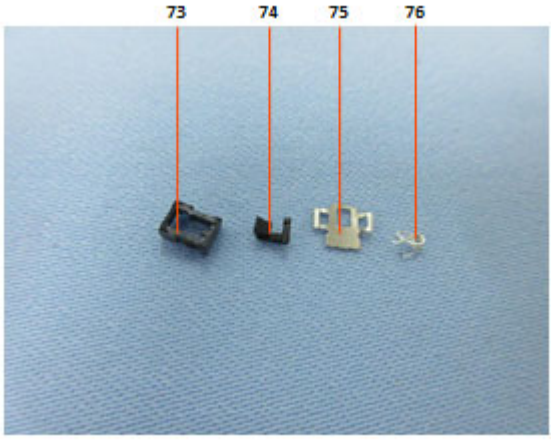
73
74
75
76

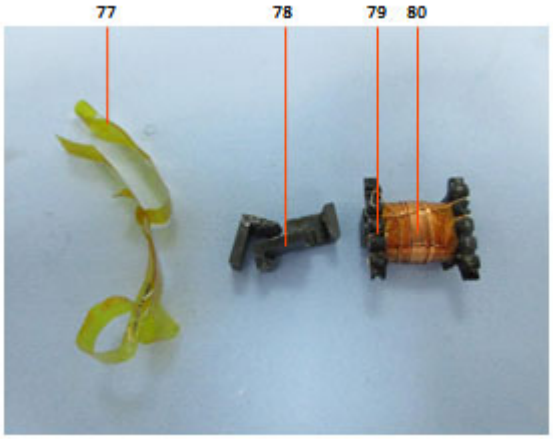
77
78
79
80

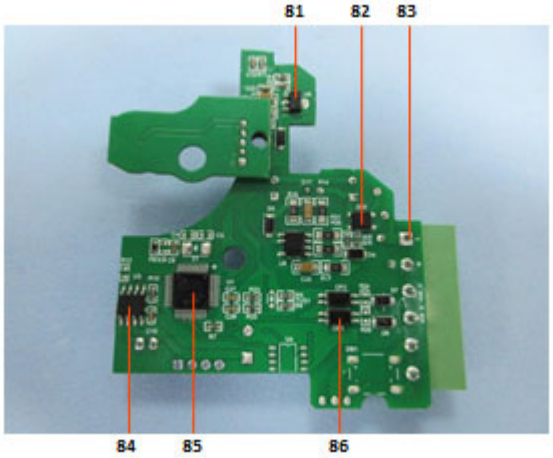
81
82
83
84
85
86

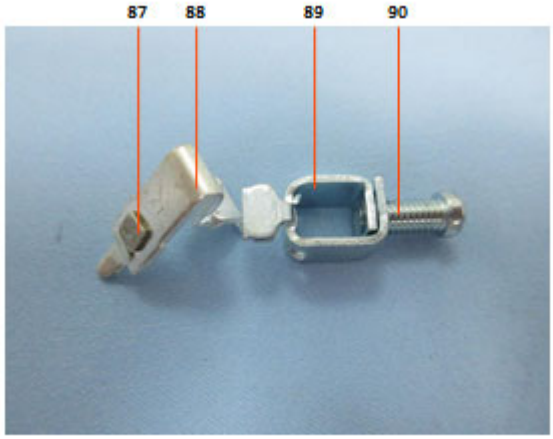
87
88
89
90

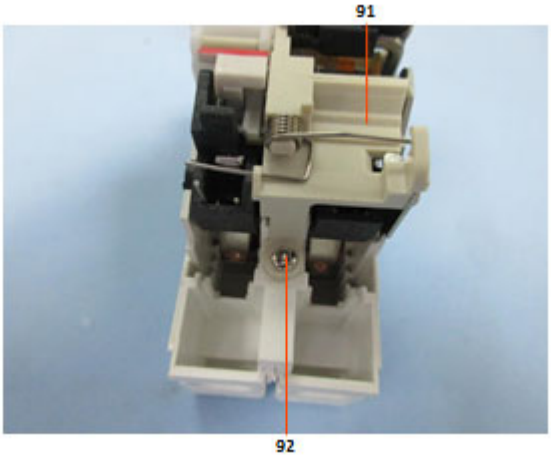
91
92

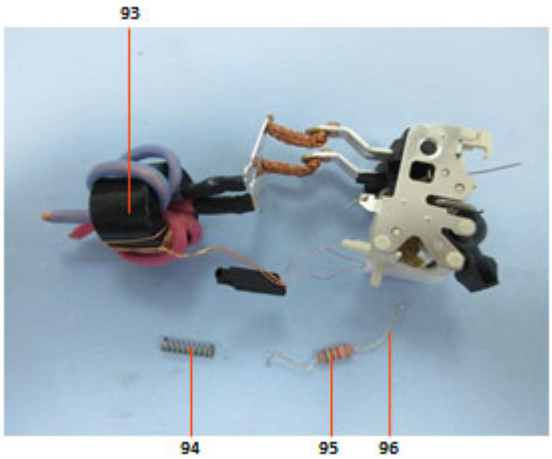
93
94
95
96

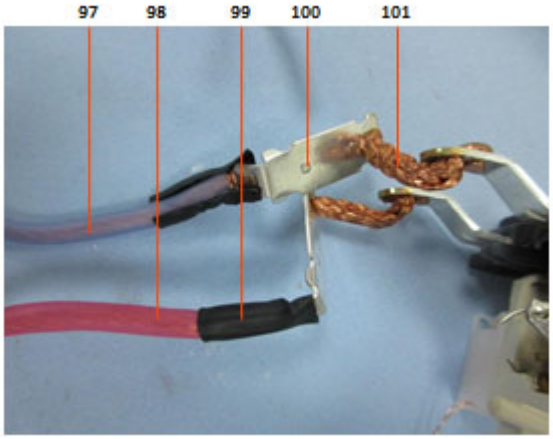
97
98
99
100
101

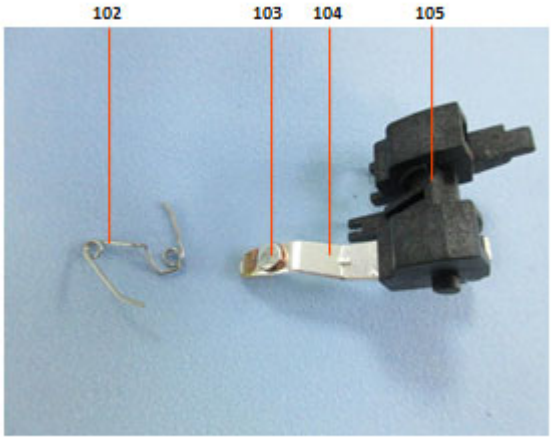
102
103
104
105

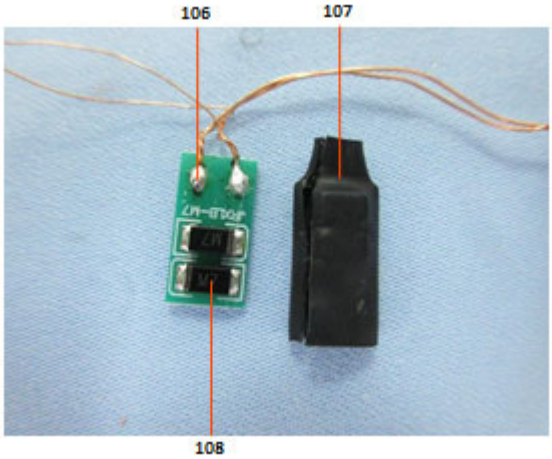
106
107
108

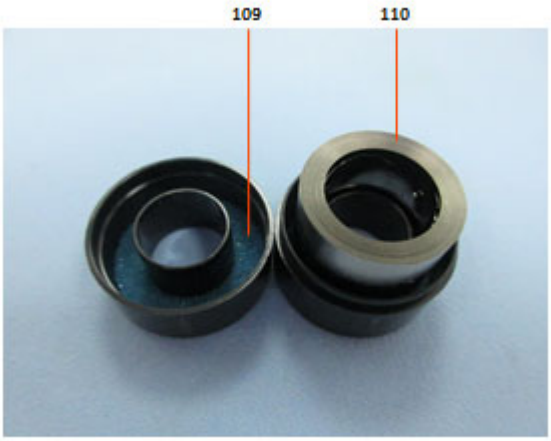
109
110

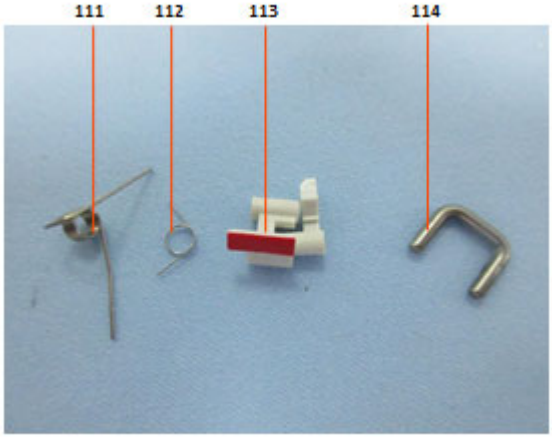
111
112
113
114

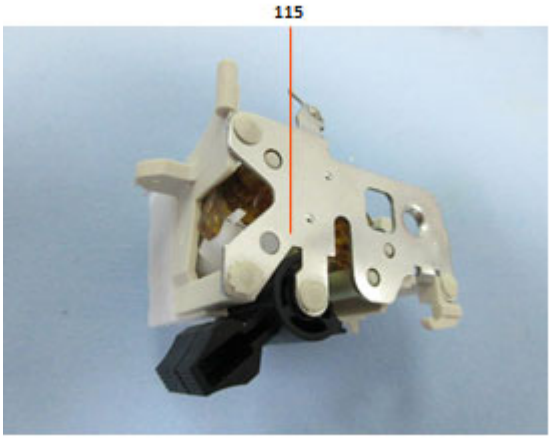
115

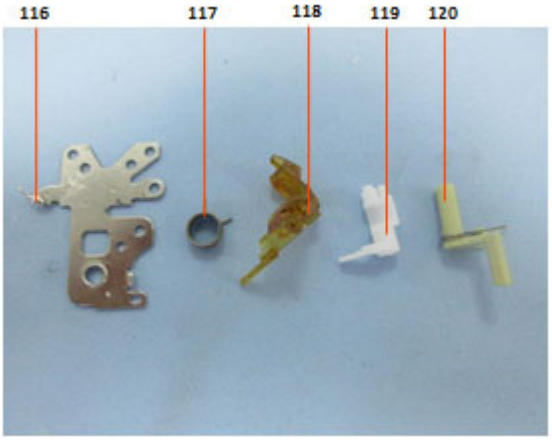
116
117
118
119
120

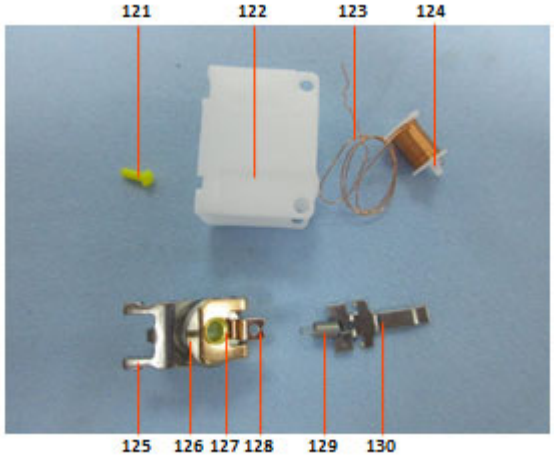
121
122
123
124
125
126
127
128
129
130

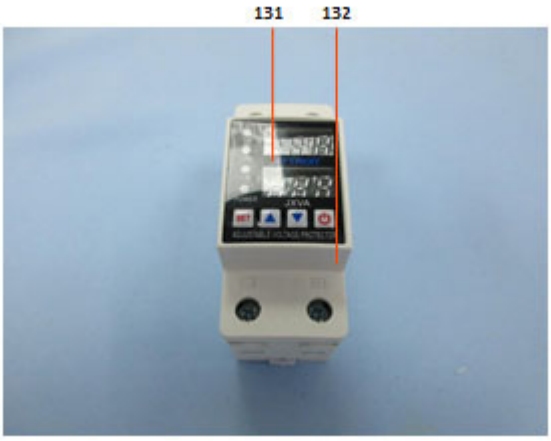
131
132

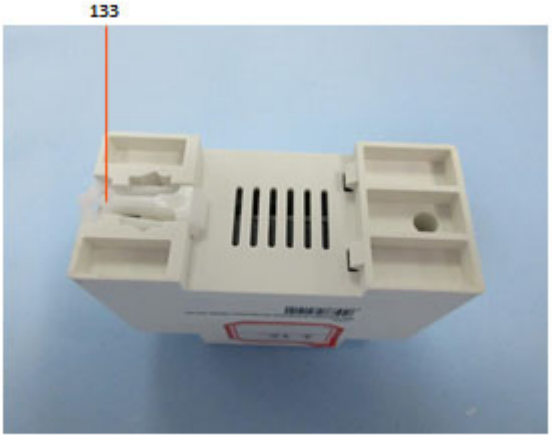
133

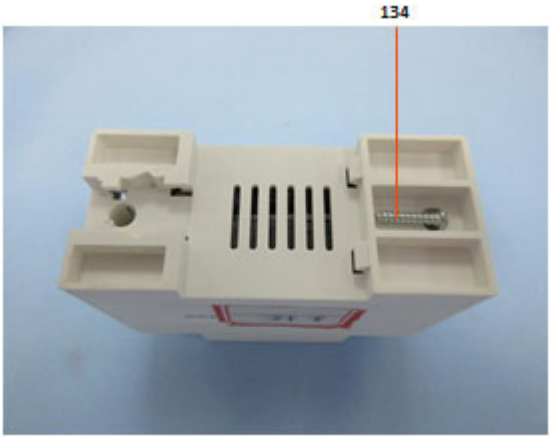
134

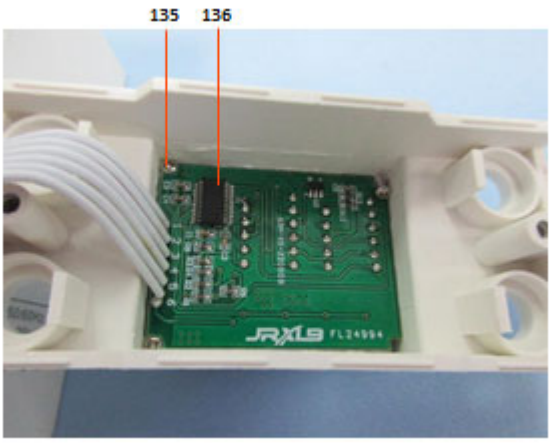
135
136

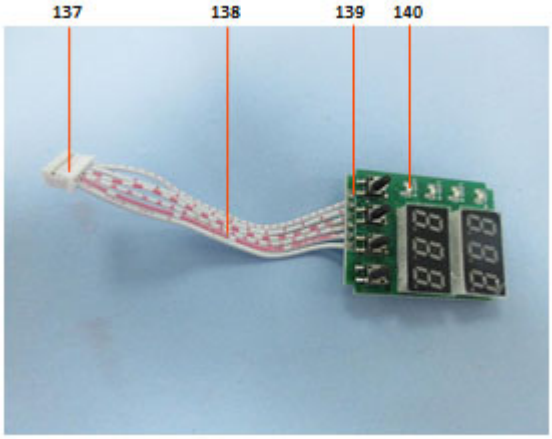
137
138
139
140

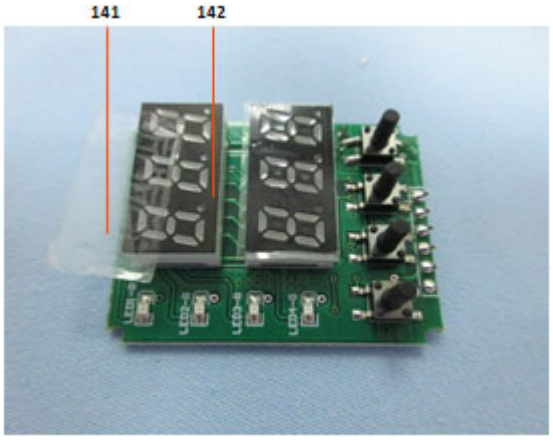
141
142

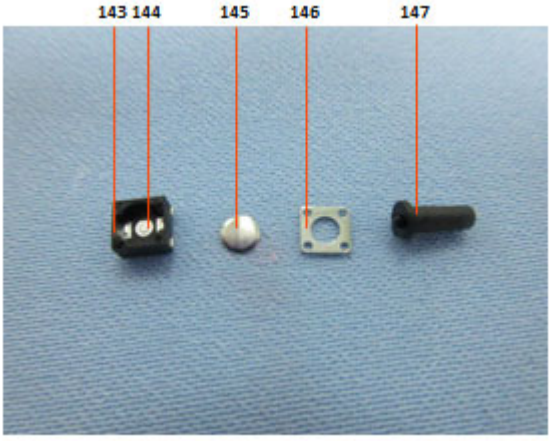
143 144
145
146
147

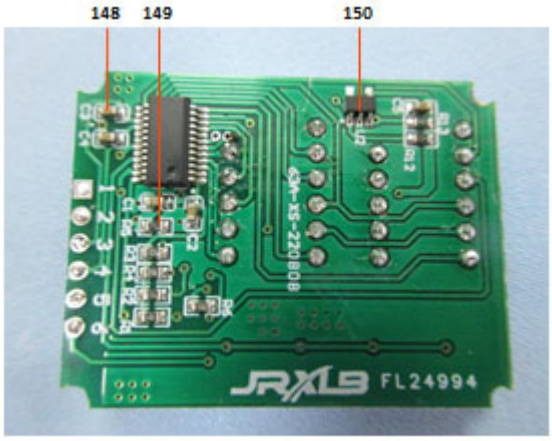
148
149
150
FL24994

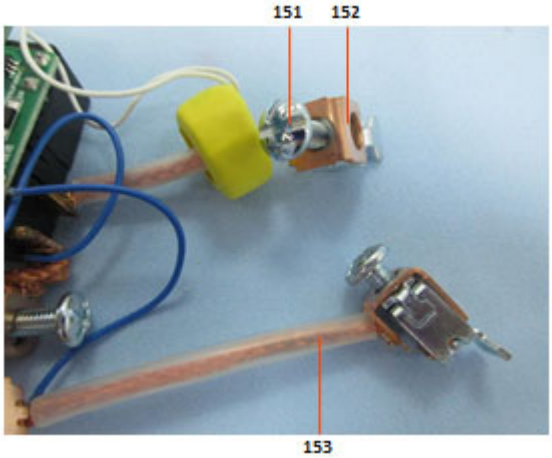
151
152
153

154

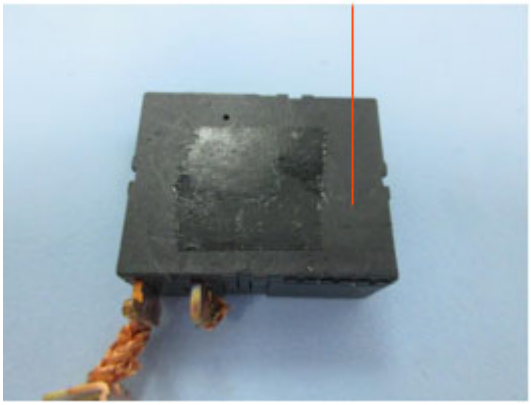

155

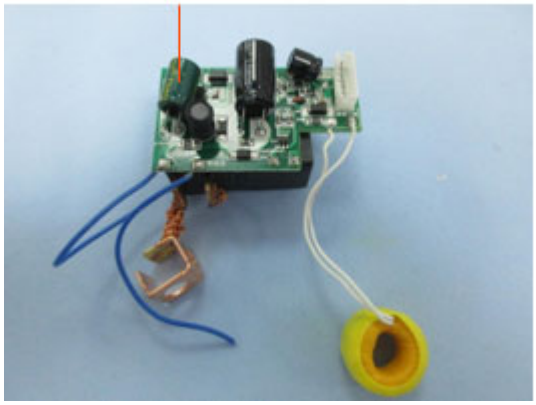

156 157 158

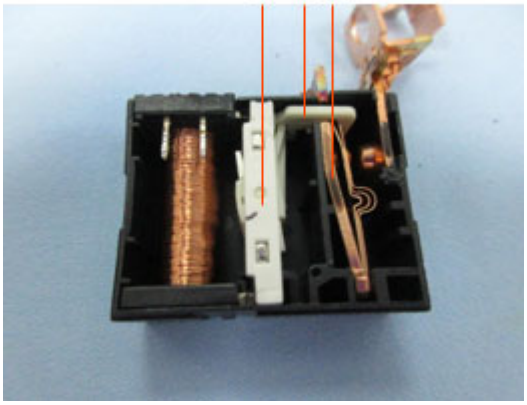

159

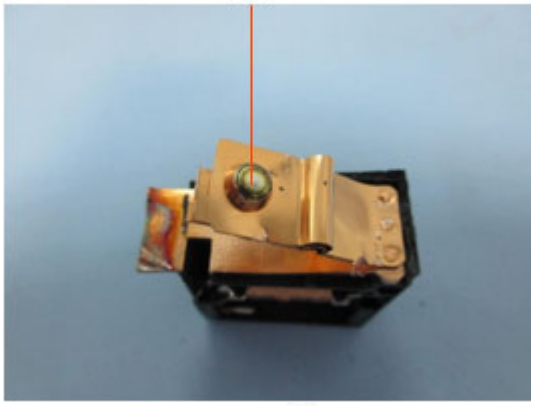

160

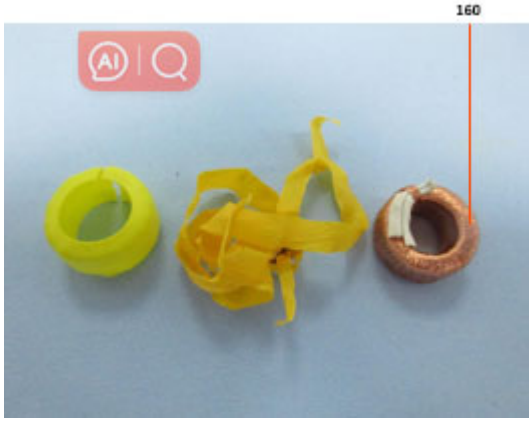

161

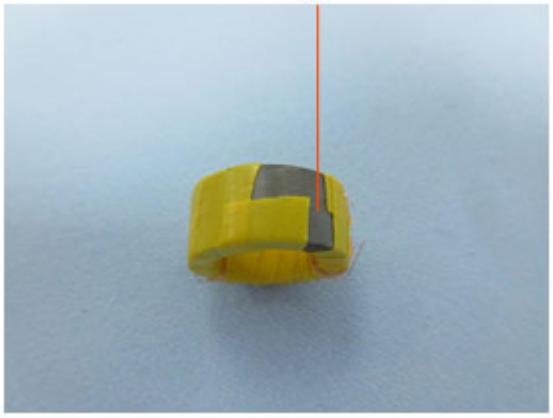

162 163 164 165 166

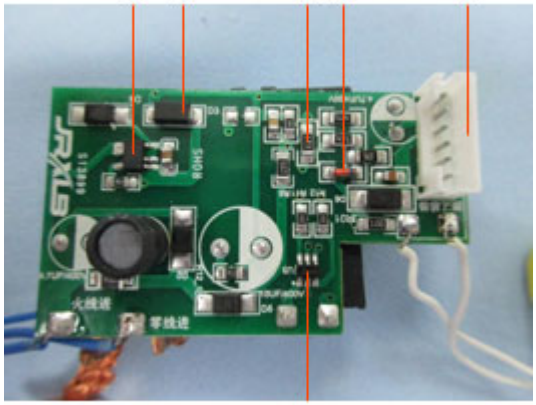

167

168

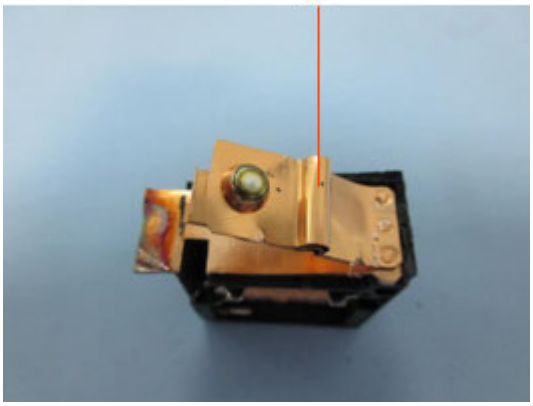

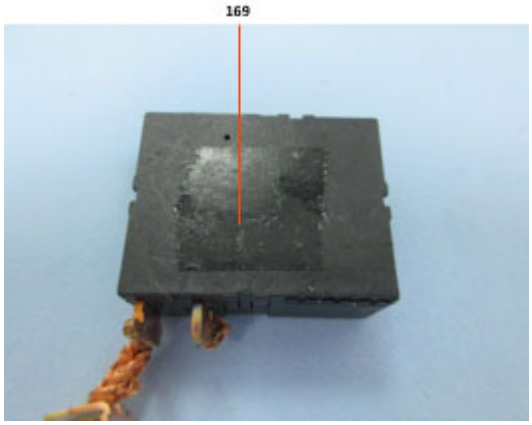


********** To be continued **********

## Remark:

**(1) For results of XRF**

(a) It is the result on total Br while test item on restricted substances is PBBs/PBDEs. It is the result on total Cr while test item on restricted substances is $Cr^{6+}$.

(b)Results are obtained by EDXRF for primary screening, and further chemical testing by ICP-OES (for Cd, Pb, Hg), UV-Vis (for $Cr^{6+}$) and GC/MS (for PBBs, PBDEs) is recommended to be performed, if the concentration exceeds the below warning value according to IEC 62321-3-1:2013 (unit: mg/kg)

| Element | Polymer | Metal | Composite Materials |
|---|---|---|---|
| Cd | BL≤(70-3σ)<X<(130+3σ) ≤OL | BL≤(70-3σ)<X<(130+3σ) ≤OL | LOD<X<(150+3σ) ≤OL |
| Pb | BL≤(700-3σ)<X<(1300+3σ) ≤OL | BL≤(700-3σ)<X<(1300+3σ) ≤OL | BL≤(500-3σ)<X<(1500+3σ) ≤OL |
| Hg | BL≤(700-3σ)<X<(1300+3σ) ≤OL | BL≤(700-3σ)<X<(1300+3σ) ≤OL | BL≤(500-3σ)<X<(1500+3σ) ≤OL |
| Br | BL≤(300-3σ)<X | -- | BL≤(250-3σ)<X |
| Cr | BL≤(700-3σ)<X | BL≤(700-3σ)<X | BL≤(500-3σ)<X |

(c) BL = Below Limit, OL = Over Limit, IN = Inconclusive, LOD = Limit of Detection,
-- = Not Regulated, NA = Not Applicable.

(d) The XRF screening test for RoHS elements – The reading may be different to the actual content in the sample be of non-uniformity composition.

**(2) For results of Chemical testing**

(a) mg/kg = ppm = 0.0001%, N.D..= Not Detected (<MDL), --- = Not Conducted.

(b) Unit and Method Detection Limit (MDL) in wet chemical test

| Test Items | Pb | Cd | Hg | DEHP | BBP | DBP | DIBP |
|---|---|---|---|---|---|---|---|
| Units | mg/kg | mg/kg | mg/kg | mg/kg | mg/kg | mg/kg | mg/kg |
| MDL | 10 | 10 | 10 | 500 | 500 | 500 | 500 |

The MDL for single compound of PBBs & PBDEs is 10 mg/kg and MDL of $Cr^{6+}$ for polymer &
composite sample is 10 mg/kg.

(c) According to IEC 62321-7-1:2015, result on $Cr^{6+}$ for metal sample is shown as Pos./Neg.
Pos. =Positive, Neg. = Negative
Pos. = Presence of $Cr^{6+}$ coating, Neg. = Absence of $Cr^{6+}$ coating.

******** **To be continued** ********

(3)RoHS Requirement

| Restricted substances | Limits |
|---|---|
| Lead (Pb) | 0.1% (1000mg/kg) |
| Cadmium (Cd) | 0.01% (100mg/kg) |
| Mercury (Hg) | 0.1% (1000mg/kg) |
| Chromium (VI) (Cr6+) | 0.1% (1000mg/kg) |
| Polybrominated biphenyls (PBBs) | 0.1% (1000mg/kg) |
| Polybrominated diphenyl ethers (PBDEs) | 0.1% (1000mg/kg) |
| Di-(2-ethylhexyl) phthalate (DEHP) | 0.1% (1000mg/kg) |
| Benzyl butyl phthalate (BBP) | 0.1% (1000mg/kg) |
| Di-n-butyl phthalate (DBP) | 0.1% (1000mg/kg) |
| Di-isobutyl phthalate (DIBP) | 0.1% (1000mg/kg) |

①Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound (RoHS Exemption 7(c)-I).

②Cadmium and its compounds in electrical contacts (RoHS Exemption (8b)-I).

At the request of client, test was conducted on the certain component of submitted sample/submitted components

********** To be continued **********

## 4.RoHS Exemptions

| Exemptions | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 1,Mercury in single capped (compact) fluorescent lamps not exceeding (per burner): | |
| 1(a),For general lighting purposes < 30 W: 2,5 mg | Expires on 24 February 2023 |
| 1(b),For general lighting purposes ≥ 30 W and < 50 W: 3,5 mg | Expires on 24 February 2023 |
| 1(c),For general lighting purposes ≥ 50 W and < 150 W: 5 mg | Expires on 24 February 2023 |
| 1(d),For general lighting purposes ≥ 150 W: 15 mg | Expires on 24 February 2023 |
| 1(e),For general lighting purposes with circular or square structural shape and tube diameter ≤ 17 mm: 5 mg | Expires on 24 February 2023 |
| 1(f)-I ,For lamps designed to emit mainly light in the ultraviolet spectrum: 5 mg | Expires on 24 February 2027 |
| 1(f)-II ,For special purposes: 5 mg | Expires on 24 February 2025' |
| 1(g),For general lighting purposes < 30 W with a lifetime equal or above 20 000 h: 3,5 mg | Expires on 24 August 2023 |
| 2(a),Mercury in double-capped linear fluorescent lamps for general lighting purposes not exceeding (per lamp): | |
| 2(a)(1),Tri-band phosphor with normal lifetime and a tube diameter < 9 mm (e.g. T2): 4 mg | Expires on 24 February 2023 |
| 2(a)(2),Tri-band phosphor with normal lifetime and a tube diameter ≥ 9 mm and ≤ 17 mm (e.g. T5): 3 mg | Expires on 24 February 2023 |
| 2(a)(3),Tri-band phosphor with normal lifetime and a tube diameter > 17 mm and ≤ 28 mm (e.g. T8): 3,5 mg | Expires on 24 February 2023 |
| 2(a)(4),Tri-band phosphor with normal lifetime and a tube diameter > 28 mm (e.g. T12): 3,5 mg | Expires on 24 February 2023 |
| 2(a)(5),Tri-band phosphor with long lifetime (≥ 25 000 h): 5 mg. | Expires on 24 February 2023 |
| 2(b), Mercury in other fluorescent lamps not exceeding (per lamp): | |
| 2(b)(2), Non-linear halophosphate lamps (all diameters): 15 mg | Expires on 13 April 2016 |
| 2(b)(3), Non-linear tri-band phosphor lamps with tube diameter > 17 mm (e.g. T9):15mg | Expires on 24 February 2023; 10 mg may be used per lamp from 25 February 2023 until 24 February 2025 |
| 2(b)(4)-I ,Lamps for other general lighting and special purposes (e.g. induction lamps): 15 mg | Expires on 24 February 2025 |
| 2(b)(4)-II ,Lamps emitting mainly light in the ultraviolet spectrum: 15 mg | Expires on 24 February 2027 |
| 2(b)(4)-III ,Emergency lamps: 15 mg | Expires on 24 February 2027 |
| 3,Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes used in EEE placed on the market before 24 February 2022 not exceeding (per lamp): | |
| 3(a),Short length (≤ 500 mm): 3,5 mg | Expires on 24 February 2025 |
| 3(b),Medium length (> 500 mm and ≤ 1 500 mm): 5 mg | Expires on 24 February 2025 |
| 3(c),Long length (> 1 500 mm): 13 mg | Expires on 24 February 2025 |
| 4(a),Mercury in other low pressure discharge lamps (per lamp): 15 mg | Expires on 24 February 2023 |
| 4(a)-I ,Mercury in low pressure non-phosphor coated discharge lamps, where the application requires the main range of the lampspectral output to be in the ultraviolet spectrum: up to 15 mg mercury may be used per lamp | Expires on 24 February 2027 |
| 4(b),Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved colour rendering index Ra > 80: P ≤ 105 W: 16 mg may be used per burner | Expires on 24 February 2027 |
| 4(b)-I ,Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved colour rendering index Ra > 60: P ≤ 155 W: 30 mg may be used per burner | Expires on 24 February 2023 |
| 4(b)-II ,Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved colour rendering index Ra > 60: 155 W < P ≤ 405 W: 40 mg may be used per burner | Expires on 24 February 2023 |
| 4(b)-III ,Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner) in lamps with improved colour rendering index Ra > 60: P > 405 W: 40 mg may be used per burner | Expires on 24 February 2023 |
| 4(c),Mercury in other High Pressure Sodium (vapour) lamps for general lighting purposes not exceeding (per burner): | |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 4(c)-I ,P ≤ 155 W: 20 mg | Expires on 24 February 2027 |
| 4(c)-II ,155 W < P ≤ 405 W: 25 mg | Expires on 24 February 2027 |
| 4(c)-III ,P > 405 W: 25 mg | Expires on 24 February 2027 |
| 4(e), Mercury in metal halide lamps (MH) | Expires on 24 February 2027 |
| 4(f)-I, Mercury in other discharge lamps for special purposes not specifically mentioned in this Annex | Expires on 24 February 2025 |
| 4(f)-II, Mercury in high pressure mercury vapour lamps used in projectors where an output ≥ 2000 lumen ANSI is required | Expires on 24 February 2027 |
| 4(f)-III, Mercury in high pressure sodium vapour lamps used for horticulture lighting | Expires on 24 February 2027 |
| 4(f)-IV, Mercury in lamps emitting light in the ultraviolet spectrum | Expires on 24 February 2027 |
| 4(g), Mercury in hand crafted luminous discharge tubes used for signs, decorative or architectural and specialist lighting and light-artwork, where the mercury content shall be limited as follows:<br>(a) 20 mg per electrode pair+0,3mg per tube length in cm, but not more than 80 mg, for outdoor applications and indoor applications exposed to temperatures below 20 ℃;<br>(b) 15 mg per electrode pair+0,24mg per tube length in cm, but not more than 80 mg, for all other indoor applications | Expires on 31 December 2018’ |
| 5(a), Lead in glass of cathode ray tubes | |
| 5(b), Lead in glass of fluorescent tubes not exceeding 0,2 % by weight | |
| 6(a), Lead as an alloying element in steel for machining purposes and in galvanized steel containing up to 0,35 % lead by weight | Expires on:<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments;<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 6(a)-I, Lead as an alloying element in steel for machining purposes containing up to 0,35 % lead by weight and in batch hot dip galvanised steel components containing up to 0,2 % lead by weight | Expires on 21 July 2021 for categories 1-7 and 10. |
| 6(b), Lead as an alloying element in aluminium containing up to 0,4 % lead by weight | Expires on:<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments,<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices,<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 6(b)-I Lead as an alloying element in aluminium containing up to 0,4 % lead by weight, provided it stems from lead-bearing aluminium scrap recycling | Expires on 21 July 2021 for categories 1-7 and 10. |
| 6(b)-II Lead as an alloying element in aluminium for machining purposes with a lead content up to 0,4 % by weight | Expires on 18 May 2021 for categories 1-7 and 10 |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 6(c), Copper alloy containing up to 4 % lead by weight | Expires on:<br>— 21 July 2021 for categories 1-7 and 10,<br>—21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments,<br>—21 July 2023 for category 8 in vitro diagnostic medical devices,<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 7(a), Lead in high melting temperature type solders (i.e. lead- based alloys containing 85 % by weight or more lead) | Applies to categories 1-7 and 10 (except applications covered by point 24 of this Annex) and expires on 21 July 2021.<br>For categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments expires on 21 July 2021.<br>For category 8 in vitro diagnostic medical devices expires on 21 July 2023.<br>For category 9 industrial monitoring and control instruments, and for category 11 expires on 21 July 2024. |
| 7(b), Lead in solders for servers, storage and storage array systems, network infrastructure equipment for switching, signalling, transmission, and network management for telecommunications | |
| 7(c)-I, Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound | Applies to categories 1-7 and 10 (except applications covered under point 34) and expires on 21 July 2021.<br>For categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments expires on 21 July 2021.<br>For category 8 in vitro diagnostic medical devices expires on 21 July 2023.<br>For category 9 industrial monitoring and control instruments,<br>and for category 11 expires on 21 July 2024. |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 7(c)-II, Lead in dielectric ceramic in capacitors for a rated voltage of 125 V AC or 250 V DC or higher | Does not apply to applications covered by point 7(c)-I and 7(c)-IV of this Annex.<br>Expires on:<br>— 21 July 2021 for categories 1-7 and 10;<br>—21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments;<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 7(c)-III, Lead in dielectric ceramic in capacitors for a rated voltage of less than 125 V AC or 250 V DC | Expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013 |
| 7(c)-Ⅳ, Lead in PZT based dielectric ceramic materials for capacitors being part of integrated circuits or discrete semiconductors | Expires on:<br>— 21 July 2021 for categories 1-7 and 10;<br>—21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments;<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 8(a), Cadmium and its compounds in one shot pellet type thermal cut-offs | Expires on 1 January 2012 and after that date may be used in spare parts for EEE placed on the market before 1 January 2012 |
| 8(b), Cadmium and its compounds in electrical contacts | Applies to categories 8, 9 and 11 and expires on:<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments;<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 8(b)-I Cadmium and its compounds in electrical contacts used in:<br>— circuit breakers,<br>— thermal sensing controls,<br>— thermal motor protectors (excluding hermetic thermal motor protectors),<br>— AC switches rated at:<br>— 6 A and more at 250 V AC and more, or<br>— 12 A and more at 125 V AC and more,<br>— DC switches rated at 20 A and more at 18 V DC and more, and<br>— switches for use at voltage supply frequency ⩾ 200 Hz. | Applies to categories 1 to 7 and 10 and expires on 21 July 2021. |
| 9, Hexavalent chromium as an anticorrosion agent of the carbon steel cooling system in absorption refrigerators up to 0,75 % by weight in the cooling solution | Applies to categories 8, 9 and 11 and expires on:<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments,<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices,<br>—21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 9(a)-I Up to 0,75 % hexavalent chromium by weight, used as an anticorrosion agent in the cooling solution of carbon steel cooling systems of absorption refrigerators (including minibars) designed to operate fully or partly with electrical heater, having an average utilised power input < 75 W at constant running conditions | Applies to categories 1-7 and 10 and expires on 5 March 2021. |
| 9(a)-II Up to 0,75 % hexavalent chromium by weight, used as an anticorrosion agent in the cooling solution of carbon steel cooling systems of absorption refrigerators:<br>— designed to operate fully or partly with electrical heater, having an average utilized power input ⩾ 75 W at constant running conditions,<br>— designed to fully operate with non-electrical heater. | Applies to categories 1-7 and 10 and expires on 5 March 2021. |
| 9(b), Lead in bearing shells and bushes for refrigerant- containing compressors for heating, ventilation, air conditioning and refrigeration (HVACR) applications | Applies to categories 8, 9 and 11; expires on:<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices,<br>—21 July 2024 for category 9 industrial monitoring and control instruments and for category 11,<br>—21 July 2021 for other subcategories of categories 8 and 9. |
| 9(b)-(I), Lead in bearing shells and bushes for refrigerant- containing hermetic scroll compressors with a stated electrical power input equal or below 9 kW for heating, ventilation, air conditioning and refrigeration (HVACR) applications | Applies to category 1; expires on 21 July 2019.’ |
| 11(a), Lead used in C-press compliant pin connector systems | May be used in spare parts for EEE placed on the market before 24 September 2010 |
| 11(b), Lead used in other than C-press compliant pin connector systems | Expires on 1 January 2013 and after that date may be used in spare parts for EEE placed on the market before 1 January 2013 |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 12, Lead as a coating material for the thermal conduction module C-ring | May be used in spare parts for EEE placed on the market before 24 September 2010 |
| 13(a), Lead in white glasses used for optical applications | Applies to all categories; expires on:<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>—21 July 2024 for category 9 industrial monitoring and control instruments and for category 11;<br>— 21 July 2021 for all other categories and subcategories |
| 13(b),Cadmium and lead in filter glasses and glasses used for reflectance standards | Applies to categories 8, 9 and 11; expires on:<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>—21 July 2024 for category 9 industrial monitoring and control instruments and for category 11;<br>—21 July 2021 for other subcategories of categories 8 and 9 |
| 13(b)-(I),Lead in ion coloured optical filter glass types | Applies to categories 1 to 7 and 10; expires on 21 July 2021 for categories 1 to 7 and 10’ |
| 13(b)-(II) ,Cadmium in striking optical filter glass types; excluding applications falling under point 39 of this Annex | Applies to categories 1 to 7 and 10; expires on 21 July 2021 for categories 1 to 7 and 10’ |
| 13(b)-(III), Cadmium and lead in glazes used for reflectance standards | Applies to categories 1 to 7 and 10; expires on 21 July 2021 for categories 1 to 7 and 10’ |
| 14, Lead in solders consisting of more than two elements for the connection between the pins and the package of micropro-cessors with a lead content of more than 80 % and less than 85 % by weight | Expires on 1 January 2011 and after that date may be used in spare parts for EEE placed on the market before 1 January 2011 |
| 15, Lead in solders to complete a viable electrical connection between semiconductor die and carrier within integrated circuit flip chip packages | Applies to categories 8, 9 and 11 and expires on: — 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments;<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 15(a) Lead in solders to complete a viable electrical connection between the semiconductor die and carrier within integrated circuit flip chip packages where at least one of the following criteria applies:<br>— a semiconductor technology node of 90 nm or larger;<br>—a single die of 300 $mm^2$ or larger in any semiconductor technology node;<br>—stacked die packages with die of 300 $mm^2$ or larger, or silicon interposers of 300 $mm^2$ or larger. | Applies to categories 1 to 7 and 10 and expires on 21 July 2021. |
| 17, Lead halide as radiant agent in high intensity discharge (HID) lamps used for professional reprography applications | |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 18(b), Lead as activator in the fluorescent powder (1 % lead by weight or less) of discharge lamps when used as sun tanning lamps containing phosphors such as BSP ($BaSi_2O_5$ :Pb) | Expires on:<br>— 21 July 2021 for categories 1-7 and 10;<br>—21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments;<br>—21 July 2023 for category 8 in vitro diagnostic medical devices;<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 18(b)-I Lead as activator in the fluorescent powder (1 % lead by weight or less) of discharge lamps containing phosphors such as BSP (BaSi2O5:Pb) when used in medical phototherapy equipment | Applies to categories 5 and 8, excluding applications covered by entry 34 of Annex IV, and expires on 21 July 2021. |
| 21, Lead and cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glasses | Applies to categories 8, 9 and 11 and expires on:<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments;<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 21(a) Cadmium when used in colour printed glass to provide filtering functions, used as a component in lighting applications installed in displays and control panels of EEE | Applies to categories 1 to 7 and 10 except applications covered by entry 21(b) or entry 39 and expires on 21 July 2021. |
| 21(b) Cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glasses | Applies to categories 1 to 7 and 10 except applications covered by entry 21(a) or 39 and expires on 21 July 2021. |
| 21(c) Lead in printing inks for the application of enamels on other than borosilicate glasses | Applies to categories 1 to 7 and 10 and expires on 21 July 2021. |
| 23, Lead in finishes of fine pitch components other than connectors with a pitch of 0,65 mm and less | May be used in spare parts for EEE placed on the market before 24 September 2010 |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 24, Lead in solders for the soldering to machined through hole discoidal and planar array ceramic multilayer capacitors | Expires on:<br>— 21 July 2021 for categories 1-7 and 10,<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments,<br>—21 July 2023 for category 8 in vitro diagnostic medical devices,<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 25, Lead oxide in surface conduction electron emitter displays (SED) used in structural elements, notably in the seal frit and frit ring | |
| 29, Lead bound in crystal glass as defined in Annex I (Categories 1, 2, 3 and 4) of Council Directive 69/493/EEC ([1]) | Expires on:<br>— 21 July 2021 for categories 1-7 and 10;<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and ontrol instruments;<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 30, Cadmium alloys as electrical/mechanical solder joints to elec-trical conductors located directly on the voice coil in transducers used in high-powered loudspeakers with sound pressure levels of 100 dB (A) and more | |
| 31, Lead in soldering materials in mercury free flat fluorescent lamps (which e.g. are used for liquid crystal displays, design or industrial lighting) | |
| 32, Lead oxide in seal frit used for making window assemblies for Argon and Krypton laser tubes | Expires on:<br>— 21 July 2021 for categories 1-7 and 10,<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments,<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices,<br>—21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 33, Lead in solders for the soldering of thin copper wires of 100 μm diameter and less in power transformers | |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 34, Lead in cermet-based trimmer potentiometer elements | Applies to all categories; expires on:<br>— 21 July 2021 for categories 1-7 and 10,<br>—21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments,<br>—21 July 2023 for category 8 in vitro diagnostic medical devices,<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 37, Lead in the plating layer of high voltage diodes on the basis of a zinc borate glass body | Expires on:<br>— 21 July 2021 for categories 1-7 and 10;<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments;<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>— 21 July 2024 for category 9 industrial monitoring and control instruments, and for category 11. |
| 38, Cadmium and cadmium oxide in thick film pastes used on aluminium bonded beryllium oxide | |
| 39(a), Cadmium selenide in downshifting cadmium-based semiconductor nanocrystal quantum dots for use in display lighting applications (< 0,2 µg Cd per mm2 of display screen area) | Expires for all categories on 31 October 2019. |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 41, Lead in solders and termination finishes of electrical and electronic components and finishes of printed circuit boards used in ignition modules and other electrical and electronic engine control systems, which for technical reasons must be mounted directly on or in the crankcase or cylinder of hand-held combustion engines (classes SH:1, SH:2, SH:3 of Directive 97/68/EC of the European Parliament and of the Council) | Applies to all categories and expires on:<br>— 31 March 2022 for categories 1 to 7, 10 and 11;<br>— 21 July 2021 for categories 8 and 9 other than in vitro diagnostic medical devices and industrial monitoring and control instruments;<br>— 21 July 2023 for category 8 in vitro diagnostic medical devices;<br>—21 July 2024 for category 9 industrial monitoring and control instruments. |
| 42, Lead in bearings and bushes of diesel or gaseous fuel powered internal combustion engines applied in non-road professional use equipment:<br>— with engine total displacement ⩾ 15 litres;<br>or<br>— with engine total displacement < 15 litres and the engine is designed to operate in applications where the time between signal to start and full load is required to be less than 10 seconds; or regular maintenance is typically performed in a harsh and dirty outdoor environment, such as mining, construction, and agriculture application | Applies to category 11, excluding applications covered by entry 6(c) of this Annex. Expires on 21 July 2024. |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX III and its subsequent amendments | |
| **Exemption Items** | **Expires Date** |
| 43, Bis(2-ethylhexyl) phthalate in rubber components in engine systems, designed for use in equipment that is not intended solely for consumer use and provided that no plasticised material comes into contact with human mucous membranes or into prolonged contact with human skin and the concentration value of bis(2-ethylhexyl) phthalate does not exceed:<br>(a) 30 % by weight of the rubber for<br>(i) gasket coatings;<br>(ii) solid-rubber gaskets; or<br>(iii) rubber components included in assemblies of at least three components using electrical, mechanical or hydraulic energy to do work, and attached to the engine.<br>(b) 10 % by weight of the rubber for rubber-containing components not referred to in point (a).<br>For the purposes of this entry, “prolonged contact with human skin” means continuous contact of more than 10 minutes duration or intermittent contact over a period of 30 minutes, per day. | Applies to category 11 and expires on 21 July 2024.’ |
| 44. Lead in solder of sensors, actuators, and engine control units of combustion engines within the scope of Regulation (EU) 2016/1628 of the European Parliament and of the Council (*) , installed in equipment used at fixed positions while in operation which is designed for professionals, but also used by non-professional users | Applies to category 11 and expires on 21 July 2024. |
| 45. Lead diazide, lead styphnate, lead dipicramate, orange lead (lead tetroxide), lead dioxide in electric and electronic initiators of explosives for civil (professional) use and barium chromate in long time pyrotechnic delay charges of electric initiators of explosives for civil (professional) use | Applies to category 11 and expires on 20 April 2026’ |
| Note: (1) OJ L 326, 29.12.1969, p.36.<br>(*) Regulation (EU) 2016/1628 of the European Parliament and of the Council of 14 September 2016 on requirements relating to gaseous and particulate pollutant emission limits and type-approval for internal combustion engines for non-road mobile machinery, amending Regulations (EU) No 1024/2012 and (EU) No 167/2013, and amending and repealing Directive 97/68/EC (OJ L 252, 16.9.2016, p. 53).’ | |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX IV and its subsequent amendments<br>Equipment utilising or detecting ionising radiation | |
| **Exemption Items** | **Expires Date** |
| 1. Lead, cadmium and mercury in detectors for ionising radiation. | |
| 2. Lead bearings in X-ray tubes. | |
| 3. Lead in electromagnetic radiation amplification devices: micro-channel plate and capillary plate. | |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX IV and its subsequent amendments<br>Equipment utilising or detecting ionising radiation | |
| **Exemption Items** | **Expires Date** |
| 4. Lead in glass frit of X-ray tubes and image intensifiers and lead in glass frit binder for assembly of gas lasers and for vacuum tubes that convert electromagnetic radiation into electrons. | |
| 5. Lead in shielding for ionising radiation. | |
| 6. Lead in X-ray test objects. | |
| 7. Lead stearate X-ray diffraction crystals. | |
| 8. Radioactive cadmium isotope source for portable X-ray fluorescence spectrometers.<br>Sensors, detectors and electrodes | |
| 8.1a. Lead and cadmium in ion selective electrodes including glass of pH electrodes. | |
| 8.1b. Lead anodes in electrochemical oxygen sensors. | |
| 8.1c. Lead, cadmium and mercury in infra-red light detectors. | |
| 8.1d. Mercury in reference electrodes: low chloride mercury chloride, mercury sulphate and mercury oxide. | |
| 9. Cadmium in helium-cadmium lasers. | |
| 10. Lead and cadmium in atomic absorption spectroscopy lamps. | |
| 11. Lead in alloys as a superconductor and thermal conductor in MRI. | |
| 12. Lead and cadmium in metallic bonds creating superconducting magnetic circuits in MRI, SQUID, NMR (Nuclear Magnetic Resonance) or FTMS (Fourier Transform Mass Spectrometer) detectors. | Expires on 30 June 2021 |
| 13. Lead in counterweights. | |
| 14. Lead in single crystal piezoelectric materials for ultrasonic transducers. | |
| 15. Lead in solders for bonding to ultrasonic transducers. | |
| 16. Mercury in very high accuracy capacitance and loss measurement bridges and in high frequency RF switches and relays in monitoring and control instruments not exceeding 20 mg of mercury per switch or relay. | |
| 17. Lead in solders in portable emergency defibrillators. | |
| 18. Lead in solders of high performance infrared imaging modules to detect in the range 8-14 µm. | |
| 19. Lead in Liquid crystal on silicon (LcoS) displays. | |
| 20. Cadmium in X-ray measurement filters. | |
| 21. Cadmium in phosphor coatings in image intensifiers for X-ray images until 31 December 2019 and in spare parts for X-ray systems placed on the EU market before 1 January 2020. | |
| 22. Lead acetate marker for use in stereotactic head frames for use with CT and MRI and in positioning systems for gamma beam and particle therapy equipment. | Expires on 30 June 2021. |
| 23. Lead as an alloying element for bearings and wear surfaces in medical equipment exposed to ionising radiation. | Expires on 30 June 2021 |
| 24. Lead enabling vacuum tight connections between aluminium and steel in X-ray image intensifiers. | Expires on 31 December 2019 |
| 25. Lead in the surface coatings of pin connector systems requiring nonmagnetic connectors which are used durably at a temperature below – 20 °C under normal operating and storage conditions. | Expires on 30 June 2021 |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX IV and its subsequent amendments<br>Equipment utilising or detecting ionising radiation | |
| **Exemption Items** | **Expires Date** |
| 26. Lead in the following applications that are used durably at a temperature below – 20 °C under normal operating and storage conditions:<br>(a) solders on printed circuit boards;<br>(b)termination coatings of electrical and electronic components and coatings of printed circuit boards;<br>(c) solders for connecting wires and cables;<br>(d) solders connecting transducers and sensors.<br>Lead in solders of electrical connections to temperature measurement sensors in devices which are designed to be used periodically at temperatures below – 150 °C. | Expires on 30 June 2021 |
| 27. Lead in<br>— solders,<br>— termination coatings of electrical and electronic components and printed circuit boards,<br>— connections of electrical wires, shields and enclosed connectors, which are used in<br>magnetic fields within the sphere of 1 m radius around the isocentre of the magnet in medical magnetic resonance imaging equipment, including patient monitors designed to be used within this sphere, or<br>magnetic fields within 1 m distance from the external surfaces of cyclotron magnets, magnets for beam transport and beam direction control applied for particle therapy. | Expires on 30 June 2020 |
| 28. Lead in solders for mounting cadmium telluride and cadmium zinc telluride digital array detectors to printed circuit boards. | Expires on 31 December 2017 |
| 29. Lead in alloys, as a superconductor or thermal conductor, used in cryo-cooler cold heads and/or in cryo-cooled cold probes and/or in cryo-cooled equipotential bonding systems, in medical devices (category 8) and/or in industrial monitoring and control instruments. | Expires on 30 June 2021 |
| 30. Hexavalent chromium in alkali dispensers used to create photocathodes in X-ray image intensifiers until 31 December 2019 and in spare parts for X-ray systems placed on the EU market before 1 January 2020. | |
| 31a. Lead, cadmium, hexavalent chromium, and polybrominated diphenyl ethers (PBDE) in spare parts recovered from and used for the repair or refurbishment of medical devices, including in vitro diagnostic medical devices, or electron microscopes and their accessories, provided that the reuse takes place in auditable closed-loop business-to-business return systems and that each reuse of parts is notified to the customer. | Expires on:<br>(a) 21 July 2021 for the use in medical devices other than in vitro diagnostic medical devices;<br>(b) 21 July 2023 for the use in in vitro diagnostic medical devices;<br>(c) 21 July 2024 for the use in electron microscopes and their accessories.’ |
| 32. Lead in solders on printed circuit boards of detectors and data acquisition units for Positron Emission Tomographs which are integrated into Magnetic Resonance Imaging equipment. | Expires on 31 December 2019 |
| 33. Lead in solders on populated printed circuit boards used in Directive 93/42/EEC class IIa and IIb mobile medical devices other than portable emergency defibrillators. | Expires on 30 June 2016 for class IIa and on 31 December 2020 for class IIb. |
| 34. Lead as an activator in the fluorescent powder of discharge lamps when used for extracorporeal photopheresis lamps containing BSP ($BaSi_2O_5$:Pb) phosphors. | Expires on 22 July 2021 |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX IV and its subsequent amendments<br>Equipment utilising or detecting ionising radiation | |
| **Exemption Items** | **Expires Date** |
| 35. Mercury in cold cathode fluorescent lamps for back-lighting liquid crystal displays, not exceeding 5 mg per lamp, used in industrial monitoring and control instruments placed on the market before 22 July 2017 | Expires on 21 July 2024 |
| 36. Lead used in other than C-press compliant pin connector systems for industrial monitoring and control instruments. | Expires on 31 December 2020. May be used after that date in spare parts for industrial monitoring and control instruments placed on the market before 1 January 2021.' |
| 37. Lead in platinized platinum electrodes used for conductivity measurementswhere at least one of the following conditions applies:<br>(a) wide-range measurements with a conductivity range covering more than 1 order of magnitude (e.g. range between 0,1 mS/m and 5 mS/m) in laboratory applications for unknown concentrations;<br>(b) measurements of solutions where an accuracy of +/– 1 % of the sample range and where high corrosion resistance of the electrode are required for any of the following:<br>(i) solutions with an acidity < pH 1;<br>(ii) solutions with an alkalinity > pH 13;<br>(iii) corrosive solutions containing halogen gas;<br>(c) measurements of conductivities above 100 mS/m that must be performed with portable instruments. | Expires on 31 December 2025 |
| 38. Lead in solder in one interface of large area stacked die elements with more than 500 interconnects per interface which are used in X-ray detectors of computed tomography and X-ray systems | Expires on 31 December 2019. May be used after that date in spare parts for CT and X-ray systems placed on the market before 1 January 2020. |
| 39. Lead in micro-channel plates (MCPs) used in equipment where at least one of the following properties is present:<br>(a)a compact size of the detector for electrons or ions, where the space for the detector is limited to a maximum of 3 mm/MCP (detector thickness+space for installation of the MCP), a maximum of 6 mm in total, and an alternative design yielding more space for the detector is scientifically and technically impracticable;<br>(b)a two-dimensional spatial resolution for detecting electrons or ions, where at least one of the following applies:<br>(i)a response time shorter than 25 ns;<br>(ii)a sample detection area larger than 149 $mm^2$;<br>(iii)a multiplication factor larger than $1,3 \times 10^3$.<br>(c)a response time shorter than 5 ns for detecting electrons or ions;<br>(d)a sample detection area larger than 314 $mm^2$ for detecting electrons or ions;<br>(e)a multiplication factor larger than $4,0 \times 10^7$. | (a) 21 July 2021 for medical devices and monitoring and control instruments;<br>(b) 21 July 2023 for in-vitro diagnostic medical devices;<br>(c) 21 July 2024 for industrial monitoring and control instruments |
| 40. Lead in dielectric ceramic in capacitors for a rated voltage of less than 125 V AC or 250 V DC for industrial monitoring and control instruments | Expires on 31 December 2020. May be used after that date in spare parts for industrial monitoring and control instruments placed on the market before 1 January 2021 |
| 41. Lead as a thermal stabiliser in polyvinyl chloride (PVC) used as base material in amperometric, potentiometric and conductometric electrochemical sensors which are used in in-vitro diagnostic medical devices for the analysis of blood and other body fluids and body gases. | Expires on 31 March 2022 |
| 42. Mercury in electric rotating connectors used in intravascular ultrasound imaging systems capable of high operating frequency (> 50 MHz) modes of operation. | Expires on 30 June 2026 |
| 43. Cadmium anodes in Hersch cells for oxygen sensors used in industrial monitoring and control instruments, where sensitivity below 10 ppm is required. | Expires on 15 July 2023 |

| **Exemptions** | |
|---|---|
| RoHS Directive 2011/65/EU ANNEX IV and its subsequent amendments<br>Equipment utilising or detecting ionising radiation | |
| **Exemption Items** | **Expires Date** |
| 44. Cadmium in radiation tolerant video camera tubes designed for cameras with a centre resolution greater than 450 TV lines which are used in environments with ionising radiation exposure exceeding 100 Gy/hour and a total dose in excess of 100kGy. | Applies to category 9. Expires on 31 March 2027. |
| 45. Bis(2-ethylhexyl) phthalate (DEHP) in ion-selective electrodes applied in point of care analysis of ionic substances present in human body fluids and/or in dialysate fluids | Expires on 21 July 2028. |
| 46. Bis(2-ethylhexyl) phthalate (DEHP) in plastic components in MRI detector coils | Expires on 1 January 2024. |
| 47. Bis(2-ethylhexyl) phthalate (DEHP), butyl benzyl phthalate (BBP), dibutyl phthalate (DBP) and diisobutyl phthalate (DIBP) in spare parts recovered from and used for the repair or refurbishment of medical devices, including in vitro diagnostic medical devices, and their accessories, provided that the reuse takes place in auditable closed-loop businessto-business return systems and that each reuse of parts is notified to the customer | Expires on 21 July 2028. |

# TESTS UNCERTAINTY

Unless otherwise stated the uncertainties for the tests and measurements are those listed in STQ Operational Instruction, in according to IEC Guide 115 “Application of Uncertainty of measurement’s to Conformity Assessment Activity in the Electrotechnical  Sector” and IECEE CTL decision sheet DSH 251B.

# MEASUREMENT EQUIPMENT AND INSTRUMENTATION

| Instrument | Manufacturer | Model |
|---|---|---|
| XRF | HORRIBA | MESA-50 |
| ICP-OES | Agilent | 710ES |
| GC-MS | Thermos | ISQ |
| Uv-vis | Jingke | UV-759S |

# PHOTOGRAPHS

**EUT IDENTIFICATION**

**PRODUCT PHOTOS**

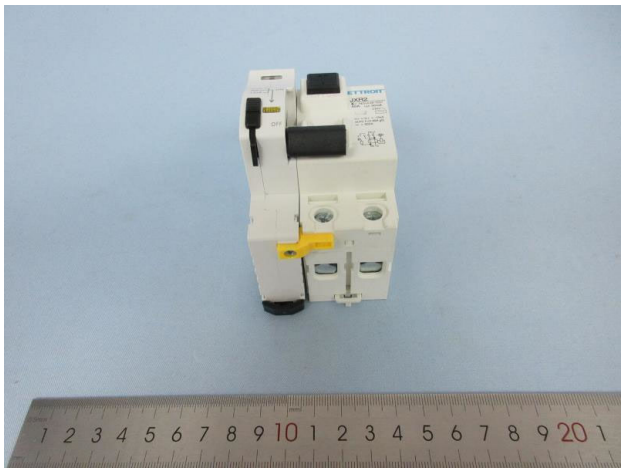

JXR2

JXVA

**END OF TEST REPORT**

# ANNEX 1: MODEL LIST

Representative models tested in this report:
JXR2, JXVA

Addtional models covered in this report based on the material declaration provided by the manufactuer:
JXDA-01, JXDA-02, JXDA-03, SUL180A, ALC18